

QEF 78% OPEN BLADE LOUVRE



Single bank extruded aluminium flat blade louvre pitched at 100mm, designed specifically for where a high open area is required and weatherability is not an issue. Typical applications include basement car parks with limited wall space for louvre openings and a need to achieve specific free areas to meet the fire regulations.




Air
Light
Vision

Construction Details

- QEF louvres are designed as component louvres for ease of installation and to maximise flexibility in architectural design.
- Louvres can be supplied as framed units or as true continuous line louvres with no restriction in height or width and no visible fixings to the exterior face.
- The system comprises louvre blades, vertical mullions with loaded blade clips and casement frame with inserts as required.
- Louvres are supplied factory finished for smaller sizes or in kit form for site assembly.
- All louvre components extruded aluminium to BS6063 T6, typically polyester powder coated to RAL or BS4800 colour range, alternative finishes include Decoral timber effect, anodised or mill finish.

Options

- Standard inserts: flange, drip and glaze-in.
- Mesh: aluminium or s/s insect mesh, or glaz. bird mesh.
- Demountable mesh frames.
- Blanking: single skin or insulated panel.
- Mullions: 4 sizes available to suit louvre height.
- Louvre doors: single or double.
- Louvre corners: fully mitred or flashed.
- Fixing cleat: adjustable angle, twist lugs or clamps.

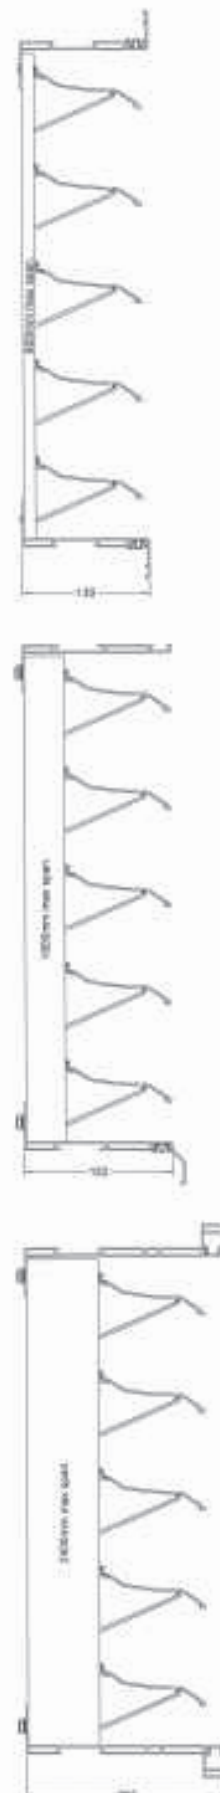

Alternative QEF Louvres

- | | |
|--------------------------------------|------------------------------------|
| QEF 50 High Performance Blade Louvre | -QEF 50 Flat Blade Louvre |
| QEF 50 Curved Blade Louvre | -QEF 50 Chevron Blade Louvre |
| QEF 75 Flat Blade Louvre | -QEF Screening Louvre |
| QEF 75 Curved Blade Louvre | -QEF Vertical Blade (Storm) Louvre |

QEF LIMITED, DUBLIN ROAD, KILKENNY, REPUBLIC OF IRELAND
E-MAIL: sales@qefltd.ie