



# **QEF 75 FLAT BLADE LOUVRE**



Single bank extruded aluminium flat blade louvre pitched at 75mm- the standard commercial louvre blade pitch to be used where sharp lines and flat surfaces form part of the architectural design. Used for general applications where good airflow is required and reasonable weathering is achieved except under severe conditions.

Web: www.gefltd.ie Tel: +353 (0) 56 776 4910 Fax: +353 (0) 56 776 1557



Light

Air

Vision

### **Construction Details**

- QEF louvres are designed as component louvres for ease of installation and to maximise flexibilty in architectural design.
- Louvres can be supplied as framed units or as true continuous line louvres with no restriction in height or width and no visible fixings to the exterior face.
- The system comprises louvre blades, vertical mullions with loaded blade clips and casement frame with inserts as required.
- Louvres are supplied factory finished for smaller sizes or in kit form for site assembly.
- All louvre components extruded aluminium to BS6063 T6, typically polyester powder coated to RAL or BS4800 colour range, alternative finishes include Decoral timber effect, anodised or mill finish.

## **Options**

- Standard inserts: flange, drip and glaze-in.
- Mesh: aluminium or s/s insect mesh, or glav. bird mesh.
- Demountable mesh frames.
- Blanking: single skin or insulated panel.
- Mullions: 4 sizes available to suit louvre height.
- Louvre doors: single or double.
- Louvre corners: fully mitred or flashed.
- Fixing cleat: adjustable angle, twist lugs or clamps.







### Technical Data

(Assessed)


Louvre Free Area 50%

Louvre Coefficient (Cd): 0.3

Performance Classification

Face Velocity	Class	
0 m/s		C2
1 m/s		D2
2 m/s		D2

Results provided by BSRIA against the standard HEVAC test to EN13030. Measuring water penetration at a given face velocity while subject to a 13m/s simulated wind velocity and simulated rain fall of 75mm/hr.

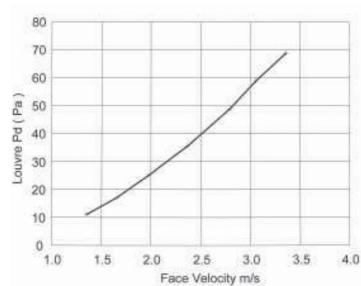

### Alternative QEF Louvres

QEF 50 High Performance Blade Louvre

QEF 50 Curved Blade Louvre

QEF 75 Curved Blade Louvre

QEF Screening Blade Louvre

-QEF 50 Flat Blade Louvre

-QEF 50 Chevron Blade Louvre

-QEF 78% Open Area Louvre

-QEF Vertical Blade (Storm) Louvre

QEF LIMITED, DUBLIN ROAD, KILKENNY, REPUBLIC OF IRELAND E-MAIL: sales@gefltd.ie

Web: www.gefltd.ie Tel: +353 (0) 56 776 4910 Fax: +353 (0) 56 776 1557